

T5 FHE Luxline Plus

21W/T5/865 FHE
0002765



Product features



PRODUCT OVERVIEW

Product name	21W/T5/865 FHE
Technology	Fluorescent
Lamp shape	Tube, double-ended
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944502
E-number SE	8356514
E-number Norway	3800983
Useful luminous flux (Fuse)	1950
Luminous flux (lm)	1750
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	85
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Power consumption (W)	21
Wattage (W)	21.00
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027654

DATA TABLE

General data

Product name	21W/T5/865 FHE
Technology	Fluorescent
Lamp shape	Tube, double-ended
Cap/Base	G5
Lamp finish	Frosted/Coated

T5 FHE Luxline Plus

21W/T5/865 FHE

0002765

Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944502
E-number SE	8356514
E-number Norway	3800983

Optical data

Useful luminous flux (Fuse)	1950
Luminous flux (lm)	1750
Luminous flux (Rated) (lm)	1750
Luminous flux (Nominal) at 35°C (lm)	1950
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	85
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

Electrical data

Power consumption (W)	21
Wattage (W)	21.00
Current (A)	0.170
Primary Supply/Product voltage - min (V)	116
Primary Supply/Product voltage - max (V)	136
Control gear required	Yes
Dimmable	Yes
Drive current (mA)	170
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	23

T5 FHE Luxline Plus

21W/T5/865 FHE
0002765

Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

Physical data

Nominal Product Length (mm)	850.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	849.0
Length base to pin Min-Max (mm) - B	853.7-856.1
Max. Lamp Length (mm) - C/L	863.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.064

Packaging


Product EAN number	5410288027654
Packaging single length / height (cm)	86.2
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027651
Units per outer package	25
Packaging outer length / height (cm)	87.6
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

Safety data


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY


T5 FHE Luxline Plus
21W/T5/865 FHE
0002765

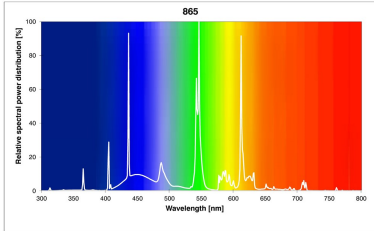

TECHNICAL DRAWINGS



0002765

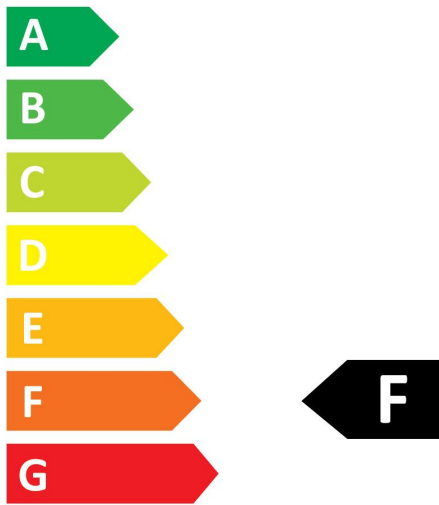

21
kWh/1000h




2019/2015

SYLVANIA

T5 FHE Luxline Plus
21W/T5/865 FHE
0002765



0002765

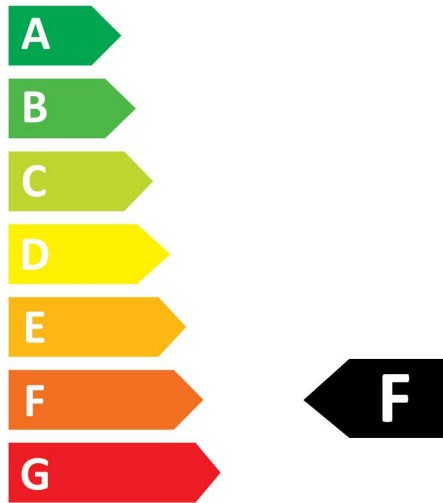

21
kWh/1000h



2019/2015