



# MaxiPlug


## Quiet Band 19dB

### PRODUCT DATA SHEET

ITEM CODE: HQB634

#### Product Overview

- **Materials:** Earplugs – PU, Band - PP
- **Protection Class:** Class 3
- **SLC80 Rating:** 19dB
- **Dimensions:** Length-16cm, Width-15cm
- **Weight:** 13.5g (+/-0.2g)
- **Country of Origin:** China

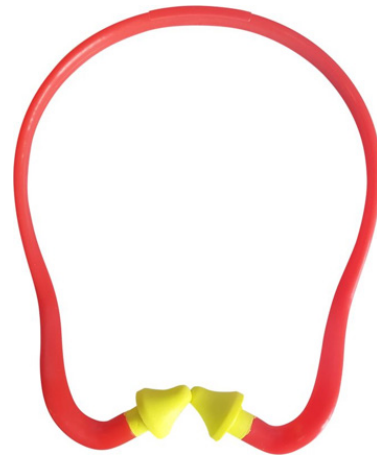

#### Applications

- |   |   |
|---|---|
| <ul style="list-style-type: none"><li>• Manufacturing</li><li>• Construction</li><li>• Law enforcement</li><li>• Military</li></ul> | <ul style="list-style-type: none"><li>• Mining</li><li>• Municipal Services</li><li>• Oil &amp; Gas</li></ul> |
|---|---|

#### Fitting Instructions



1. Position the HEB651 under the chin as shown in fig.1. Use your hands to press the ear pods well into the ear canal using an inward motion.
2. Protection levels are improved by pulling ear up & back when fitting as shown in Fig.2.
3. Proper fit: In a noisy environment, highly press the band inward with fingertips, as shown in Fig. 3. You should not notice a significant difference in noise level.

Hearing protector class 3 tested to AS/NZS 1270 when selected, used and maintained as specified in AS/NZS:1269, this protector may be used in noise up to 110dB(A) assuming an 82dB(A) criterion. A lower criterion may required a high protection class.

#### Packaging

Pack Qty: 10

Carton Qty: 100

#### Care/Usage:

Washable, reusable, replaceable


#### Standards and Certification



Parts & Accessories

Code	Description
HQB678	Maxiplug Quiet Band Replacement Pods

Guide to Sound Levels

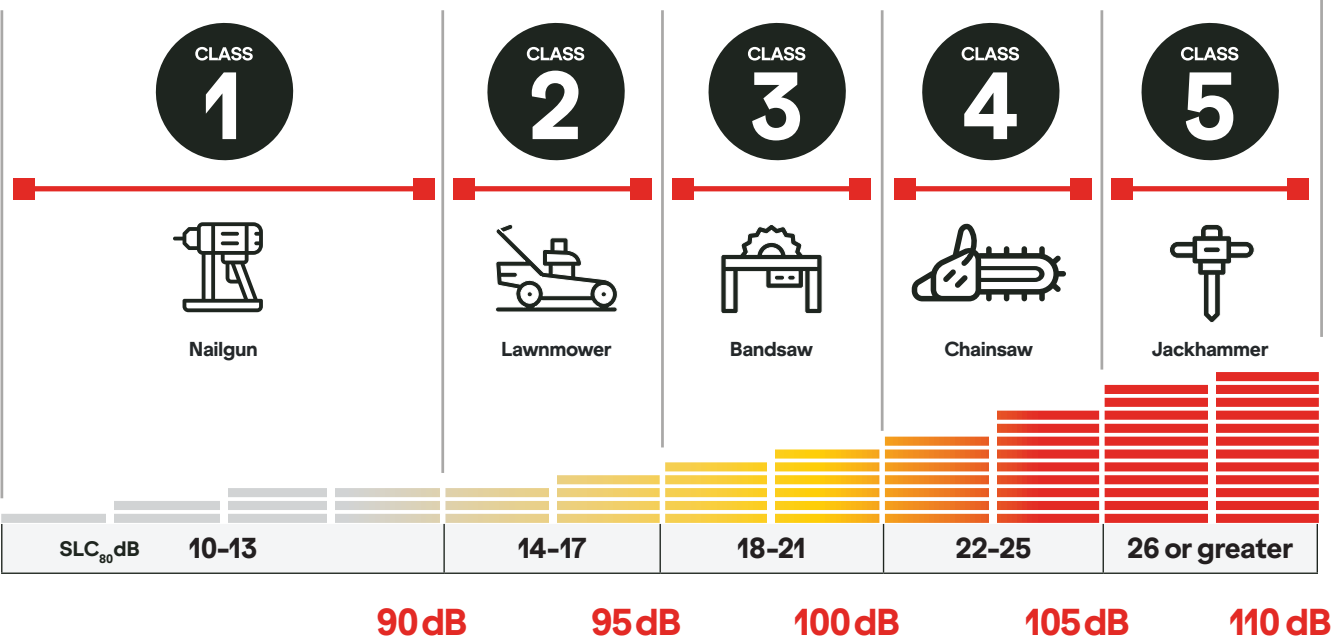

Class: 3 SLC80: 21dB, Mass: 15.3g

Freq. Hz	125	250	500	1000	2000	4000	8000	SLC <sup>80</sup>	Class
Mean	26.8	23.1	24.3	24.9	31.2	33.7	37.88	21	5
Std. Deviation	8.8	8.1	8.9	7.4	6.4	6.5	8.9		
Mean SD	18	15	15.4	17.5	24.8	27.2	28.9		